

WTL-03 WTL-04  
WOLTA®

WTL-03B

180°  
угол  
поворота

WTL-04B

180°  
угол  
поворота



Ra ≥ 80



≤ 5%



IP40



4



+1..+45°



30 000



II



~220-240



2

## WTL 03B/WTL 04B


WTL-20W/03B	20	1600	80	4000	120	330 33 60
WTL-30W/03B	30	2400	80	4000	120	465 33 60
WTL-20W/04B	20	1800	90	4000	60	330 33 60
WTL-30W/04B	30	2700	90	4000	60	465 33 60




SMD

WTL-03 COB

WTL-04.



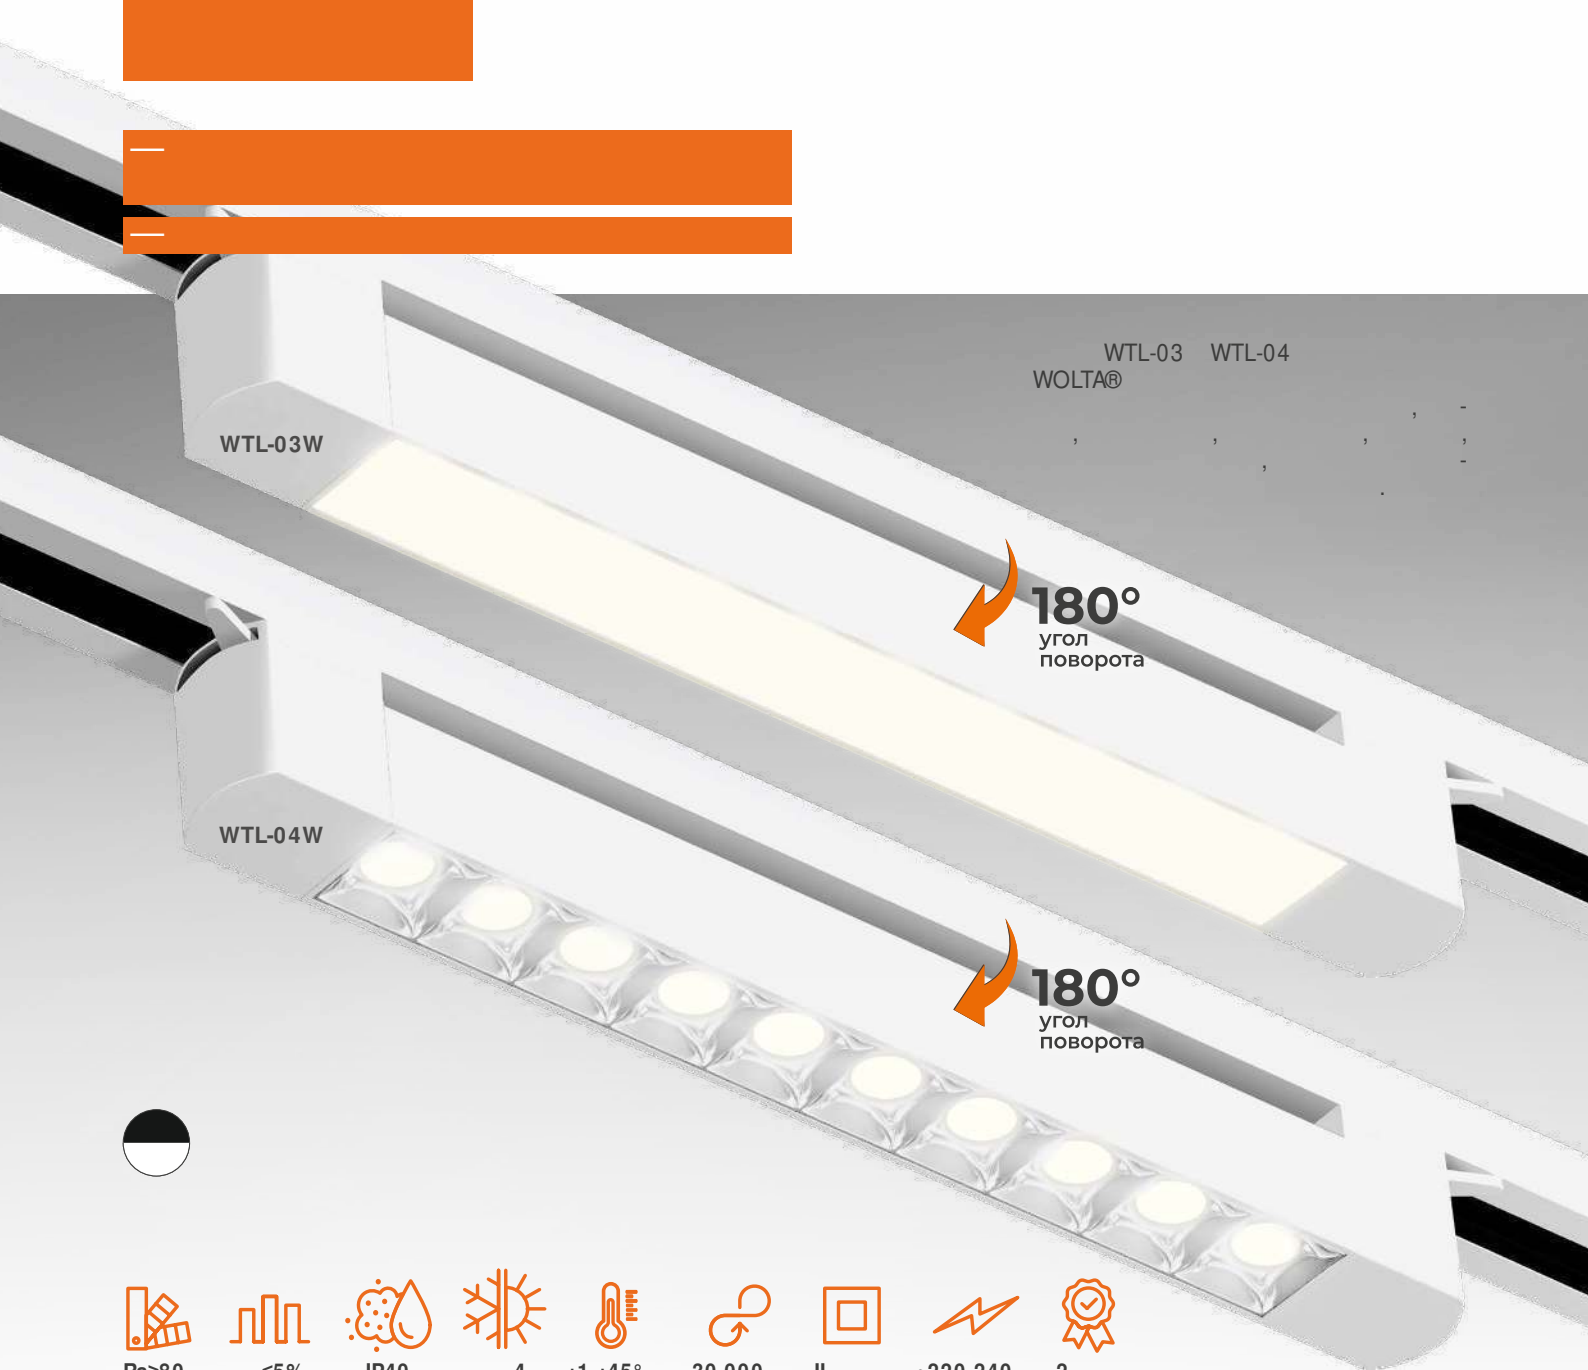

- Ra ≥ 80
- ≤ 5%
- IP40
- 4
- +1..+45°
- 30 000
- II
- ~220-240
- 2

### WTL 03W/WTL 04W

	20	30	40	50	60	70	80
WTL-20W/03W	20	1600	80	4000	120	330	33 60
WTL-30W/03W	30	2400	80	4000	120	465	33 60
WTL-20W/04W	20	1800	90	4000	60	330	33 60
WTL-30W/04W	30	2700	90	4000	60	465	33 60



- SMD
- WTL-03 COB
- WTL-04.

