

WTL-03 WTL-04  
WOLTA®

WTL-03B

180°  
угол  
поворота

WTL-04B

180°  
угол  
поворота



Ra ≥ 80



≤ 5%



IP40



4



+1..+45°



30 000



II



~220-240



2

## WTL 03B/WTL 04B


Model	Height	Length	Depth	Power	Beam Angle	Mounting Hole Spacing	Mounting Hole Diameter	Mounting Hole Distance
WTL-20W/03B	20	1600	80	4000	120	330	33	60
WTL-30W/03B	30	2400	80	4000	120	465	33	60
WTL-20W/04B	20	1800	90	4000	60	330	33	60
WTL-30W/04B	30	2700	90	4000	60	465	33	60




SMD

WTL-03 COB

WTL-04.



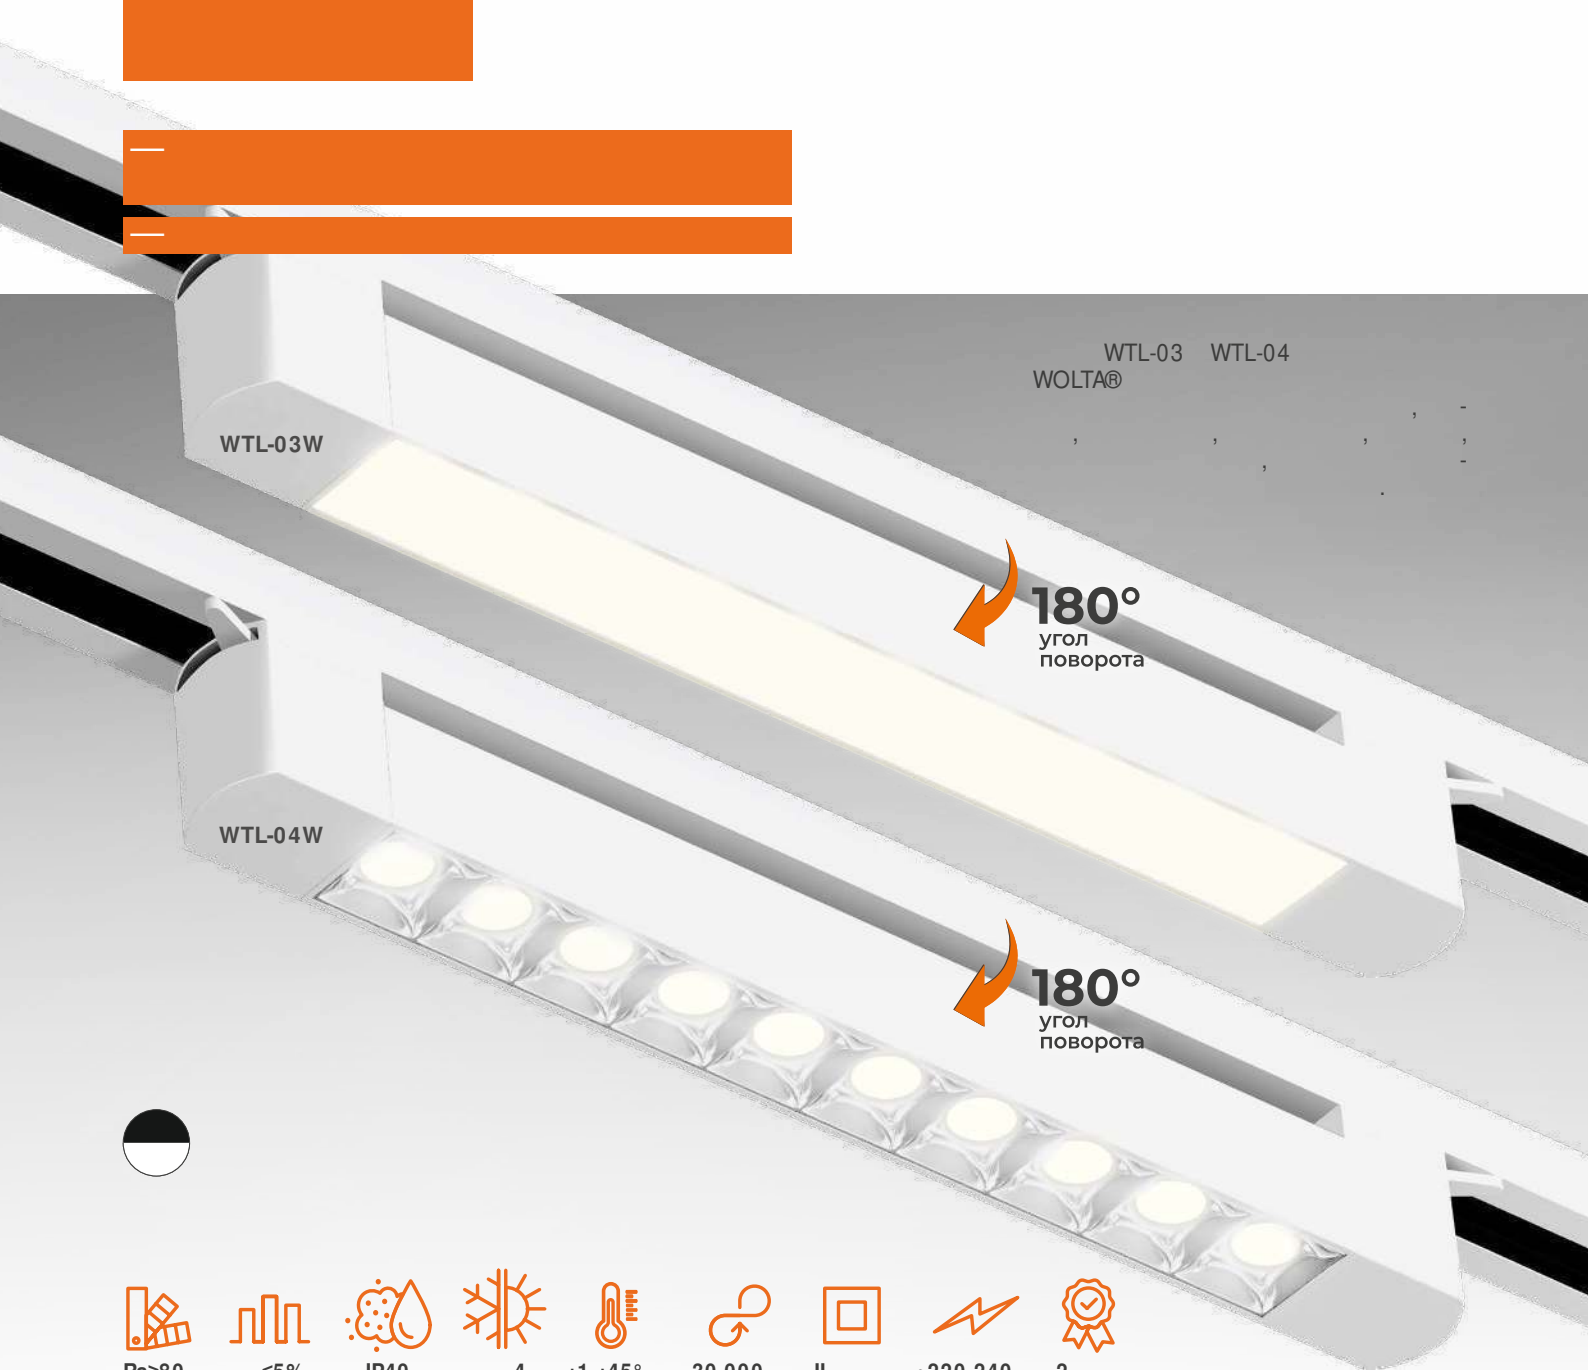

WTL-03 WTL-04  
WOLTA®

WTL-03W

WTL-04W

180°  
угол поворота

180°  
угол поворота



- Ra≥80
- ≤5%
- IP40
- 4
- +1..+45°
- 30 000
- II
- ~220-240
- 2

## WTL 03W/WTL 04W

Model	Height	Length	Width	Power	Temp	Beam Angle	Beam Diameter	Beam Diameter	Beam Diameter
WTL-20W/03W	20	1600	80	4000	120	330	33	60	
WTL-30W/03W	30	2400	80	4000	120	465	33	60	
WTL-20W/04W	20	1800	90	4000	60	330	33	60	
WTL-30W/04W	30	2700	90	4000	60	465	33	60	



- 
- 
- 
- 

SMD WTL-03 COB WTL-04.

